

# JLG® ENGINE POWERED

Aerial Work Platforms



**JLG**<sup>®</sup>  
reachingout<sup>®</sup>

# JLG® AERIAL WORK PLATFORMS REACHING OUT

On the job site, days are measured by productivity. Your productivity. Which means you need equipment that stands up to the day's demands. JLG has what you need so you can put in the most productive day possible. Engine powered boom lifts that take you higher and further. Scissor lifts that can handle more workers and supplies in one shot.

Whether you're treading on slab or off, JLG® boom and scissor lifts provide superior performance and reliability. Our boom lifts feature larger work envelopes, dual-rated capacities and reach heights that will let you rise to the challenge. Our engine powered scissor lifts deliver exceptional terrainability and gradeability. JLG boom and RT scissor lifts have the capacity to accommodate both workers and our exclusive Workstation in the Sky® accessories.

Give your day's productivity a major boost upward..

## POWER AND REACH

*"JLG machines give me all the power I need to get the job done on time and on budget."*



**FOR THE BEST  
OUTDOOR PERFORMANCE**





## NARROW DESIGN. EASY MOBILITY.

With standard four-wheel drive, rugged lug tread tires and 35% gradeability, you'll be able to keep work moving, on or off slab. The 260MRT mid-size rough terrain scissor lift delivers exceptional mobility thanks to a narrow 69 in. (1.75 m) chassis that gets you into those challenging spots. A large work platform with a 4 ft roll-out deck extension keeps everything you need within arm's reach. Simplified ground control wiring and built-in diagnostics are provided for serviceability.

*"Getting around crowded job sites is no problem."*

## 260MRT SERIES



### Room to Work

Larger deck space and 1,250 lb capacity so you can be more productive.



### Serviceability

Ease of service with built-in diagnostics.

## HIGHER CAPACITIES. BIGGER PLATFORMS.

The powerful RT Series lets you work more efficiently on the job, over a range of applications, with increased lift capacities and bigger platforms. This is critical when you have applications requiring multiple sheets of drywall or siding. When you want to finish on time and on budget, put the RT Series to work for you.

Set up quickly and efficiently with the optional one-touch leveling jacks. With an average leveling time of 15 to 30 seconds, you can cut set up time by 100% compared to other scissor lifts.



### TRAVERSE ROUGH TERRAIN

Hydrostatic 4-wheel drive delivers unmatched terrainability and up to 45% gradeability.



## RT SERIES



### Leveling Jacks

Meet uneven surfaces head-on with the push of a button. You get precise self-leveling when positioned on up to a five degree angle from side to side and up to a four degree angle from front to rear.



### More Capacity

Maximum 2,250 lb capacity for more workers and materials.

## GO FARTHER WITH A WIDER RANGE OF MOTION

When you're working around tricky architecture or smaller spaces where access can be limited, the 450AJ helps you stay on track. With a larger work envelope, you can extend your reach and increase your productivity. The exclusive Control ADE® (Advanced Design Electronics) system improves your performance and serviceability. Our familiar control system, used on other JLG® engine powered boom lifts, means less time training and more time working.

### IMPROVED ACCESS

A standard articulating jib and 20 ft of horizontal outreach on the 340AJ and 25 ft of outreach on the 450AJ let you access hard-to-reach places.



## 450AJ AND 340AJ




### 45% Gradeability

Improved rough terrain capabilities for optimal off-slab productivity.



### Stay on the Job Longer

Provides better fuel efficiency to lower costs and increase uptime.

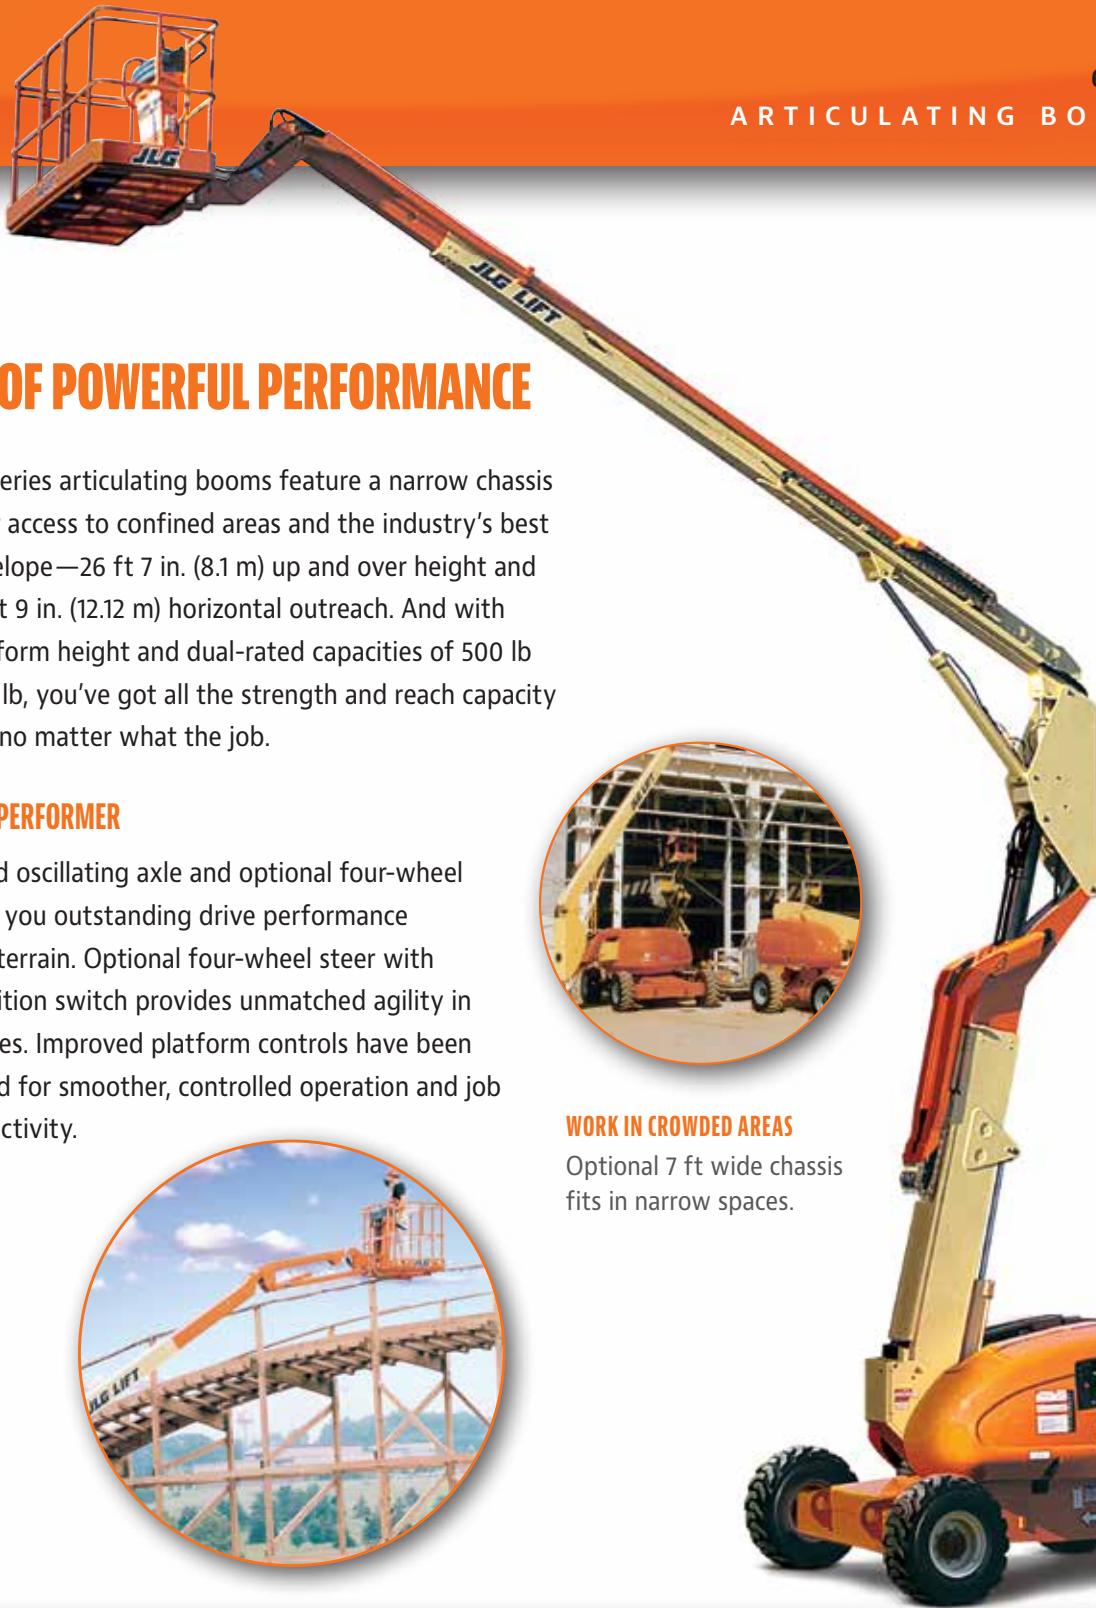

## 60 FT OF POWERFUL PERFORMANCE

The 600 Series articulating booms feature a narrow chassis option for access to confined areas and the industry's best work envelope—26 ft 7 in. (8.1 m) up and over height and up to 39 ft 9 in. (12.12 m) horizontal outreach. And with 60 ft platform height and dual-rated capacities of 500 lb and 1,000 lb, you've got all the strength and reach capacity you need no matter what the job.

### VERSATILE PERFORMER

A standard oscillating axle and optional four-wheel drive give you outstanding drive performance on rough terrain. Optional four-wheel steer with three-position switch provides unmatched agility in tight spaces. Improved platform controls have been redesigned for smoother, controlled operation and job site productivity.



### WORK IN CROWDED AREAS

Optional 7 ft wide chassis fits in narrow spaces.



## 600 SERIES



### Better Access

Jib-equipped models add 70 degrees of upward and 60 degrees of downward motion.



### Go Anywhere

Four-wheel drive option and a standard oscillating axle provide superior terrainability.

## RAISING SAFETY STANDARDS FOR AIRCRAFT MAINTENANCE

The ideal machine for working on aircraft of any size, the Model 740AJ features 74 ft (22.6 m) of height, over 51 ft (15 m) of outreach and includes the safety features you need when performing maintenance. Add the Fall Arrest platform, which allows you to exit the platform and move a full 270 degrees around the platform within a radius of six feet, while still having fall protection.

An optional on-board air compressor allows for pneumatic-powered hand tools, maximizing productivity.



### OPTIONAL SOFT TOUCH SYSTEM

The Soft Touch System reduces the risk of accidental contact and damage during aircraft maintenance. This optional package features a suspended padded rail that surrounds the platform basket. Proximity sensors de-activate platform movement functions and alert the operator if the basket comes too close to the aircraft surface.

## 740AJ SERIES



### Greater Access

Articulating jib allows for more precise positioning and access to all external surfaces on any aircraft.



### Work in Any Area

Can be used in controlled and uncontrolled areas thanks to jet blast standards of 80-mph steady winds and 90-mph gusts.



## GREATER PRODUCTIVITY— FROM THE GROUND UP

You can reach higher and get to your work faster with the 800 Series. Our exclusive QuikStik® boom takes you from the ground to 80 ft (24.38 m) in less than 50 seconds. Whether you're venturing on or off rough terrain, the 800 Series has all the strength and versatility you need.

### EXTRA REACH AND IMPROVED PERFORMANCE

With the industry's best reach envelope—32 ft (9.75 m) of up and over and 51 ft (15.54 m) of outreach, there's no obstacle you can't handle. Be the boss of rough terrain thanks to improved traction from the oscillating axle and 45% gradeability.



### BETTER MACHINE PERFORMANCE

Advanced Design Electronics (Control ADE™) system provides smoother machine functions, increased fuel efficiency and reduced emissions.



## 800 SERIES



### Added Versatility

Exclusive Workstation in the Sky® options and accessories help extend the versatility of your machine.



### Easier to Maintain

Swing-out engine tray allows for faster and easier access for routine maintenance.

## THE FASTEST LIFT AND DRIVE SPEEDS IN THEIR CLASS

Experience a productivity boost with the 400 Series. With a lift speed of 33 seconds, 4.25 mph (6.8 kph) drive speed and up to 3.5 ft (1.07 m) more reach, you can get to work quickly and efficiently. Customize your function speeds with the Control ADE® system.

### STAY IN CONTROL

Customer-preferred controls mean fewer buttons and switches used to position the platform and less time spent learning to use the platform controls. Our exclusive Control ADE system improves machine maintainability while an engine swing-out tray provides greater serviceability access. For jobs that require welding, choose a model with an on-board Miller® welding system (see page 13).



## 400 SERIES



### More Reach

A 6 ft articulating jib gives you the added access you need.



### Greater Capacity

20% more platform capacity than competitive models (600 lb unrestricted).

## CONQUER HIGHER CHALLENGES AND TOUGHER TERRAIN

With the powerful combination of performance and reliability of the 600 Series, you can conquer all of your worksite challenges. The JLG® 600 Series has the industry's highest platform capacity of 1,000 lb (454 kg) and the largest work envelope for improved access. Mud, sand and rough terrain are no match for the standard oscillating axle and 45% gradeability. Additional features include a versatile articulating jib for a wider range of motion, a swing-out engine tray for easier access for routine maintenance and smoother machine functions.

### CRAWL ALL OVER TOUGH JOBS

When you need ultimate terrainability, choose the 600 Crawler Series. A crawler undercarriage, 1,000 lb (454 kg) capacity, improved maneuverability on soft surfaces and zero turning radius get you in places others just can't go. Plus, the 600 Crawler Series is equipped with all-steel tracks.



## 600 SERIES



### More Outreach

Over 56 ft of horizontal outreach for improved access.



### 45% Gradeability

An oscillating axle improves traction over mud and uneven terrain.



## HIGHER REACH CONFIDENT CONTROL

Go from the ground to 80 ft in less than 67 seconds—that's 40% faster than the competition. These 80 ft machines are packed with job-proven performance—up to 75 ft (22.86 m) of horizontal outreach and dual-rated platform capacities up to 1,000 lb (454 kg). Its narrow fixed-width chassis gets you in and out of confined spaces while the 6 ft (1.83 m) articulating jib gives you the additional access you need.

### ADVANCED CONTROLS

With the same set of controls installed on the entire JLG® boom lift family, you'll find that operating your lift is simple. The Advanced Design Electronics (Control ADE®) system provides smoother machine functions, increased fuel efficiency and reduced emissions.

### WORKSTATION IN THE SKY® ACCESSORIES

Choose packages built for welding, cutting steel, using power tools or working at night.



## 800 SERIES



### Narrow Width

Narrow fixed-width frame allows for faster setup.



### Solid Ground

45% gradeability and oscillating axle for improved traction.



## CONTROL ADE® SYSTEM

Our exclusive Advanced Design Electronics (Control ADE) System helps optimize productivity while lowering your owning and operating costs.

- **Commonality of Components—**

The Control ADE System is standard across all JLG engine powered boom models.

- **Higher Productivity—**

Provides smoother machine functions, increased fuel efficiency and reduced emissions.

- **Enhanced Reliability—**

Significantly reduces the number of wires and connections.

- **Improved Serviceability—**

The self-test capability reduces troubleshooting time and identifies potential problems.

- **Enhanced Performance—**

Allows function speeds and options to be customized to meet customer preferences.

## FEATURES



### Lift/Swing

Multiple use of control—lift and swing can be operated simultaneously.



### Drive Control

Ease of drive operation—joystick with integrated thumb steer.



### Ground Control Console

Mounted in the turntable, the ground control console features function symbols to guide you.



## WORKSTATION IN THE SKY® ACCESSORIES

Turn your engine powered aerial work platform into an integrated work tool with Workstation in the Sky® accessories. These packages are designed to increase your productivity, conserve platform space and improve working conditions.

### SKYPOWER® PACKAGE

Machines with the SkyPower® system are equipped with a self-contained 7500W continuous output generator with a power cable installed in the power track. In addition, it provides self-contained 110V-AC, 220V-AC and 3-phase power to run other accessories and hand tools.

### SKYGUARD®

Boom lift operators experience enhanced control panel protection with SkyGuard.

When activated by approximately 50 lb (23kg) of force, SkyGuard stops all functions in use at the time.



### NITE BRIGHT® PACKAGE

This package consists of 40-watt lights to illuminate your work site and the area around the chassis for increased visibility. It is perfect for any job with low lighting levels.



### SKYWELDER® PACKAGE

With a 280 amp Miller® CST 280 welder tucked into the SkyPower platform, space is conserved while providing stick and TIG capability. The SkyWelder® package eliminates potentially dangerous leads hanging over the rails and the unnecessary cost of a stand-alone welder and power supply.



### SKYGLAZIER® PACKAGE

The first and only factory-approved glass and panel tray. Panels are protected from damage and productivity is improved while operator fatigue is reduced. And with JLG® 1,000 lb capacity, the basket can hold multiple workers and larger glass panels.



### SKYAIR® PACKAGE

With an integrated on-board air compressor, the SkyAir® package delivers 9.3 CFM at pressures up to 125 psi. It increases productivity by eliminating the need for a ground-based compressor.



### PIPE RACK ACCESSORY

Manufacturer-approved pipe racks provide positive retention of materials while storage outside the platform helps prevent rail damage and optimizes space.



### MILLER® ON BOARD

Miller welders and plasma cutters are mounted in the platform to increase workspace and for added productivity.

### SKYCUTTER® PACKAGE

Eliminating the danger of tanks and draping hoses, SkyCutter® cuts faster and cleaner with an on-board Miller® Spectrum 375 Cutmate plasma cutter.



## Scissor Lift ACCESSORIES



### NITE BRIGHT® PACKAGE

This package consists of 40-watt lights to illuminate your work site and the area around the chassis for increased visibility. It is perfect for tunnel or mine applications, nighttime work or any job with low lighting levels.



### PIPE RACKS

Conserve platform space and reduce trip hazards by storing the materials on the outside of the platform. Pipe racks help keep your tools and materials organized and within reach. Pipe racks come standard with plumbing, plant maintenance and electrician packages.



### WORKSTATION IN THE SKY®

The removable WorkStation in the Sky® helps you to optimize platform space with compartments for tools such as reciprocating saws, drills or circular saws. The WorkStation has 6 in. x 6 in. compartments for keeping boxes of connectors, hangers or other fasteners within easy reach and off of the floor. It also features a pull-out tray that provides a flat working surface near the top of the platform rails.



An optional 12V plug is connected to the scissor batteries to provide power to the customer-supplied tool or phone charger.

The WorkStation is a standard feature on plumbing, plant maintenance and electrician packages.





## PUTTING YOUR WORK ABOVE EVERYTHING

When it comes to JLG® Ground Support, it's all about you. Your productivity. Your profitability. Your uptime. From the purchase of your first piece of equipment straight through to the training, parts and maintenance that follows.



### ■ Customer Service Call Center

You can be assured we'll be giving an all-out effort to support you. Just think of us as your personal on-call, full-service support team. We make it happen. Period.

### ■ Aftermarket Parts

Keep your equipment running at peak performance with genuine replacement parts, accessories, attachments, rebuilt and competitive parts all from one source — JLG.

### ■ Training

Knowing your equipment inside and out results in higher productivity on the job. Our instructor-led courses give you the hands-on time you need to successfully operate equipment.


### ■ Service Centers

Your needs. Your uptime. JLG is on the job to fulfill your every need, from repair, reconditioning, same-day parts and much more. We're here to support you.

### ■ Pre-Owned Equipment

As a high-value alternative to purchasing new equipment, you can search our used equipment inventory of pre-owned JLG and competitor products.

# Engine Powered Aerial Work Platforms SPECIFICATIONS



## Main Features


- Oscillating axle (except 260MRT).
- 4-wheel drive.
- Automatic transmission.
- 4 ft (1.22 m) manual deck extension.
- 110V-AC receptacle in platform.

	260MRT	3394RT	4394RT	530LRT
<b>Rough Terrain Scissor Lifts</b>				
Platform Height	26 ft (7.92 m)	33 ft (10.06 m)	43 ft (13.11 m)	53 ft (16.2 m)
Platform Capacity	1,250 lb (567 kg)	2,250 lb (1,020 kg)	1,500 lb (680 kg)	1,500 lb (680 kg)
Capacity on Extension	300 lb (136 kg)	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)
Capacity w/Dual Extensions	N/A	2,000 lb (907 kg)	1,250 lb (567 kg)	1,500 lb (680 kg)
Platform Size	65 x 102 in. (1.65 x 2.59 m)	86 x 150 in. (2.18 x 3.18 m)	86 x 150 in. (2.18 x 3.81 m)	73.5 x 156 in. (1.87 x 3.96 m)
Overall Width	5 ft 9 in. (1.75 m)	7 ft 10 in. (2.4 m)	7 ft 10 in. (2.4 m)	7 ft 7 in. (2.31 m)
Weight	7,360 lb (3,338 kg)	11,910 lb (5,402 kg)	15,250 lb (6,917 kg)	17,000 lb (7,711 kg)
Dual Fuel Engine—Kubota GM Vortec 3000 MPFI	24.5 hp (18.3 kW) —	— 82 hp (61.1 kW)	— 82 hp (61.1 kW)	29 hp (21.6 kW) —
Diesel Engine—Kubota Deutz D2.9L4 Tier 4 Final	23.5 hp (17.5 kW) —	— 48.8 hp (36.4 kW)	— 48.8 hp (36.4 kW)	24.8 hp (18.5 kW) —

## Available Options

3000 Watt, 110V-AC Power Pack Generator	.	.	.	.
3500 Watt, 110V-AC Generator	.	.	.	.
33.5 lb (15.19 kg) Propane Tank	.	.	.	.
43.5 lb (19.73 kg) Propane Tank	.	.	.	.
Flashing Amber Beacon	.	.	.	.
Leveling Jacks	.	.	.	STD
Platform Worklights	.	.	.	.
Self-Closing Entry Gate	.	.	.	STD
1/2 in. Air Line to Platform	.	.	.	.
Dual 48 in. Manual Deck Extensions	.	.	.	.
Cold Weather Start Kit	.	.	.	.
3000 Watt Generator	.	.	.	.
4000 Watt Generator	.	.	.	.
7500 Watt Generator	.	.	.	.

# Engine Powered Aerial Work Platforms SPECIFICATIONS



### Main Features

- Oscillating axle.
- 2-wheel drive or 4-wheel drive.
- Control ADE® System.
- 110V-AC receptacle in platform.
- Easy access swing-out engine tray.



### Main Features

- Choice of chassis width available.
- 2-wheel drive or 4-wheel drive.
- Oscillating axle.
- Control ADE® System.
- 110V-AC receptacle in platform.
- Easy access swing-out engine tray.

	<b>340AJ</b>	<b>450AJ</b>
<b>450 Series II and Model 340AJ Articulating Boom Lifts</b>		
Platform Height	33 ft 10 in (10.31 m)	45 ft (13.72 m)
Platform Capacity—Unrestricted	500 lb (227 kg)	550 lb (250 kg)
Horizontal Outreach	19 ft 11 in (6.08 m)	25 ft (7.62 m)
Up and Over Height	17 ft (5.17 m)	24 ft (7.3 m)
Overall Width	6 ft 4 in (1.93 m)	7 ft 8.6 in. (2.35 m)
Weight	9,700 lb (4,400 kg)	12,650 lb (5,738 kg)
Dual Fuel Engine—PSI/GM Vortec 3000 MPFI	28.7 hp (21.4 kW)	82 hp (61 kW)
Diesel Engine—Kubota D1105 Deutz TD2.9L4 Tier 4 Final	24.8 hp (18.5 kW) —	— 48.8 hp (36.4 kW)

### Available Options


1/2 in. Air Line to Platform	.	.
SkyPower®	.	.
Fall Arrest Platform	.	.
Cold Weather Start Kit—Includes battery blanket, hydraulic tank heater, and block heater.	.	.
Arctic Package	.	.
Self-Closing Gate	.	.

	<b>600A</b>	<b>600A Narrow</b>	<b>600AJ</b>	<b>600AJ Narrow</b>
<b>600 Series Articulating Boom Lifts</b>				
Platform Height	60 ft 5 in. (18.42 m)	60 ft 5 in. (18.42 m)	60 ft 7 in. (18.46 m)	60 ft 7 in. (18.46 m)
Platform Capacity—Restricted	1,000 lb (454 kg)	1,000 lb (454 kg)	N/A	N/A
Platform Capacity—Unrestricted	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)
Horizontal Outreach	39 ft 7 in. (12.07 m)	39 ft 7 in. (12.07 m)	39 ft 9 in. (11.81 m)	39 ft 9 in. (11.81 m)
Up and Over Height	26 ft 7 in. (8.1 m)	26 ft 7 in. (8.1 m)	26 ft 7 in. (8.1 m)	26 ft 7 in. (8.1 m)
Overall Width	8 ft 2 in. (2.49 m)	7 ft (2.13 m)	8 ft 2 in. (2.49 m)	7 ft (2.13 m)
Weight	21,640 lb (9,816 kg)	24,100 lb (10,931 kg)	22,240 lb (10,088 kg)	24,200 lb (10,977 kg)
Dual Fuel Engine—GM Vortec 3000 MPFI	82 hp (61 kW)	82 hp (61 kW)	82 hp (61 kW)	82 hp (61 kW)
Diesel Engine—Deutz TD2.9L4 Tier 4 Final	67 hp (50 kW)	67 hp (50 kW)	67 hp (50 kW)	67 hp (50 kW)

### Available Options

1/2 in. Air Line to Platform	.	.	.	.
SkyPower®	.	.	.	.
Fall Arrest Platform	.	.	.	.
43.5 lb (19.73 kg) Propane Tank	.	.	.	.
Cold Weather Start Kit—Includes engine block heater, battery heater, and oil tank heater.	.	.	.	.
Arctic Package	.	.	.	.
Self-Closing Gate	.	.	.	.

# Engine Powered Aerial Work Platforms SPECIFICATIONS



## Main Features

- Exclusive Fall Arrest system.
- Full 270-degree access around the platform.
- Meets jet blast standards (ARP 1328).

## 740AJ

### 740AJ Articulating Boom Lift

Platform Height	74 ft (22.56 m)
Platform Capacity—Unrestricted	500 lb (227 kg)
Horizontal Outreach	51 ft 10 in. (15.8 m)
Up and Over Height	25 ft 1 in. (7.65 m)
Overall Width	8 ft (2.44 m)
Weight	36,200 lb (16,5420 kg)
Dual Fuel Engine—GM Vortec 3000 MPFI	82 hp (61.1 kW)
Diesel Engine—Deutz TD2.9L4 Tier 4 Final	67 hp (50 kW)

### Available Options

Soft Touch System	-
43.5 lb (19.73 kg) Propane Tank	-
Cold Weather Start Kit— Includes engine block heater, battery heater and oil tank heater.	-
Flashing Amber Beacon	-
Hostile Environment Kit— Includes boom wipers, cylinder bellows and console cover.	-
Self-Closing Gate	-



## Main Features

- Industry's best reach envelope in its class.
- Exclusive QuikStik® boom.
- Oscillating axle and 4-wheel drive.
- SkyPower® 7500 W Generator.

## 800A

## 800AJ

### 800 Series Articulating Boom Lifts

Platform Height	80 ft (24.38 m)	80 ft (24.38 m)
Platform Capacity (Restricted)	1,000 lb (454 kg)	N/A
Platform Capacity (Unrestricted)	500 lb (227 kg)	500 lb (227 kg)
Horizontal Outreach	53 ft (16.15 m)	51 ft 10 in. (15.8 m)
Up and Over Height	32 ft 1 in. (9.78 m)	32 ft 1 in. (9.78 m)
Overall Width	8 ft 2 in. (2.49 m)	8 ft 2 in. (2.49 m)
Weight	34,300 lb (15,558 kg)	34,300 lb (15,558 kg)
Dual Fuel Engine—GM Vortec 3000 MPFI	82 hp (61.1 kW)	82 hp (61.1 kW)
Diesel Engine—Deutz TD2.9L4 Tier 4 Final	67 hp (50 kW)	67 hp (50 kW)

### Available Options

15-625 Foam-Filled Tires	-	-
Soft Touch System 6 ft/8 ft	-	-
36 x 72 in. (0.91 x 1.83 m) Platform	-	-
43.5 lb (19.73 kg) Propane Tank	-	-
Cold Weather Start Kit— Includes engine block heater, battery heater, oil tank heater.	-	-
Arctic Package	-	-
Hostile Environment Kit— Includes console cover, boom wipers and cylinder bellows.	-	-
Self-Closing Gate	-	-

# Engine Powered Aerial Work Platforms SPECIFICATIONS

	400S	460SJ
<b>400 Series Telescopic Boom Lifts</b>		
Platform Height	40 ft (12.19 m)	46 ft (14.05 m)
Platform Capacity—Restricted	1,000 lb (454 kg)	N/A
Platform Capacity—Unrestricted	600 lb (272 kg)	600 lb (272 kg)
Horizontal Outreach	33 ft 3 in. (10.13 m)	39 ft (12 m)
Overall Width	7 ft 6.8 in. (2.31 m)	7 ft 6.8 in. (2.31 m)
Weight	13,640 lb (6,187 kg)	16,600 lb (7,530 kg)
Dual Fuel Engine—GM Vortec 3000 MPFI	82 hp (61 kW)	82 hp (61 kW)
Diesel Engine—Deutz D2.9L4 Tier 4 Final	49 hp (36.4 kW)	49 hp (36.4 kW)

## Available Options

1/2 in. Air Line to Platform	-	-
SkyPower® 7500 Watt Generator	-	-
36 x 72 in. (0.91 x 1.83 m) Platform	-	-
43.5 lb (19.73 kg) Propane Tank	-	-
Cold Weather Start Kit—Includes engine block heater, battery heater, oil tank heater.	-	-
Arctic Package	-	-
Self-Closing Gate	-	-



## Main Features

- 90% faster boom speed.
- 100% more platform capacity.
- 29% faster drive speeds.
- Oscillating axle.

# Engine Powered Aerial Work Platforms SPECIFICATIONS




## Main Features

- Oscillating axle.
- Control ADE® System.
- 110V-AC receptacle in platform.

	600S	660SJ	600SC	660SJC
<b>600 Series Telescopic Boom Lifts</b>				
Platform Height	60 ft 3 in. (18.36 m)	66 ft 8 in. (20.32 m)	60 ft 3 in. (18.36 m)	66 ft 8 in. (20.32 m)
Platform Capacity—Restricted	1,000 lb (454 kg)	N/A	1,000 lb (454 kg)	N/A
Platform Capacity—Unrestricted	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)
Horizontal Outreach	49 ft 6 in. (15.09 m)	56 ft 9 in. (17.3 m)	49 ft 6 in. (15.09 m)	56 ft 9 in. (17.30 m)
Overall Width	8 ft 2 in. (2.49 m)	8 ft 2 in. (2.49 m)	8 ft 2 in. (2.49 m)	8 ft 2 in. (2.49 m)
Weight	21,800 lb (9,888 kg)	26,650 lb (12,088 kg)	22,500 lb (10,206 kg)	27,100 lb (12,293 kg)
Dual Fuel Engine—GM Vortec 3000 MPFI	82 hp (61.1 kW)	82 hp (61.1 kW)	—	—
Diesel Engine—Deutz TD2.9L4 Tier 4 Final	67 hp (50 kW)	67 hp (50 kW)	67 hp (50 kW)	67 hp (50 kW)
<b>Available Options</b>				
Soft Touch System 6 ft/8 ft	.	.	.	.
Platform Worklights	.	.	.	.
36 x 72 in. (0.91 x 1.83 m) Platform	.	.	.	.
43.5 lb (19.73 kg) Propane Tank	.	.	.	.
Arctic Package	.	.	.	.
Cold Weather Start Kit—Includes engine block heater, battery heater and oil tank heater.	.	.	.	.
Flashing Amber Beacon	.	.	.	.
Hostile Environment Kit—Includes boom wipers, cylinder bellows and console cover.	.	.	.	.
Self-Closing Gate	.	.	.	.

# Engine Powered Aerial Work Platforms SPECIFICATIONS



### Main Features

- Substantial horizontal reach.
- Control ADE® System.
- 110V-AC receptacle in platform.

	<b>800S</b>	<b>860SJ</b>
<b>800 Series Telescopic Boom Lifts</b>		
Platform Height	80 ft (24.38 m)	86 ft (26.21 m)
Platform Capacity—Restricted	1,000 lb (454 kg)	750 lb (340 kg)
Platform Capacity—Unrestricted	500 lb (227 kg)	500 lb (227 kg)
Horizontal Outreach	71 ft (21.64 m)	75 ft (22.9 m)
Overall Width	8 ft 2 in. (2.49 m)	8 ft 2 in. (2.49 m)
Weight	33,200 lb (15,059 kg)	36,400 lb (16,510 kg)
Dual Fuel Engine—GM Vortec 3000 MPFI	82 hp (61.1 kW)	82 hp (61.1 kW)
Diesel Engine—Deutz TD2.9L4 Tier 4 Final	67 hp (50 kW)	67 hp (50 kW)
<b>Available Options</b>		
Light Package — Includes head and tail lights and platform worklights.	·	·
Tow Package	·	·
36 x 72 in. (0.91 x 1.83 m) Platform	·	·
36 x 96 in. (0.91 x 2.44 m) Fall Arrest Platform — Rear Entry	·	·
Cold Weather Start Kit — Includes engine block heater, battery heater and oil tank heater.	·	·
Arctic Package	·	·
Self-Closing Gate	·	·

**JLG Industries, Inc.**

1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417

**[www.jlg.com](http://www.jlg.com)**

**An Oshkosh Corporation Company**

Part No.: 3131564  
R101513  
Printed in USA

